




- ◆ Dual channel
- ◆ Standard Output
- ◆ Pulse Width 60-250 Microseconds, Adjustable
- ◆ Pulse Rate 2-150 Hz, Adjustable
- ◆ Pulse Amplitude: 0-80v Each channel (500 OHM Load)
- ◆ Wave Form: Modified Square Wave with Zero Net D.C. Component
- ◆ System Includes: **Stimulator, Lead Wires (New FDA compliant), 4 Self-stick Hypoallergenic Reuseable Electrodes, 9 Volt Battery, Hard Plastic Carrying case, Instruction Booklet.**

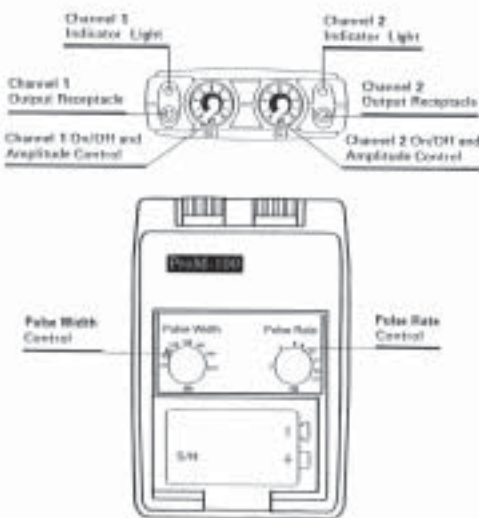

TECHNICAL SPECIFICATION
ProM-100 (SINGLE MODE)

Channels:	Dual, isolated between channels
Wave form:	Modified square with zero net direct current (DC) component
Pulse Amplitude:	0 to 80 mA each channel, adjustable (500 ohm load)
Pulse Frequency:	2 TO 150 Hz adjustable
Pulse width:	60 to 250 microseconds, adjustable
Maximum charge:	20 micro coulombs per pulse
Power source:	9 volt alkaline battery or similar rechargeable cell
Battery life:	70 hours average usage (alkaline)
Size:	24 x 64 x 95 mm
Weight:	130 grams (including battery)

All values have 10% +/- tolerance

Voice: 215.938.0200 ~ Toll-Free 1.800.472.9190 ~ Fax: 215.938-9309

www.ProMedSpecialties.com ~ 1800 Byberry Rd. Unit 905 ~ Huntingdon Valley, PA 19006 ~ USA